


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	2200	~	3500	MHz
Passband IL	/	/			1.5	dB
Ripple	任意102	MHz			0.2	dB
Ripple	全通带	/			0.5	dB
Rejection	4300	MHz ≥	50			dBc
Passband VSWR	/	/			1.35	

Other parameters

Connector	SMA-K
Impedance	50Ω
Surface	Silver plating
Power	10W Design assurance
Delay ripple	≤0.5ns@带内任意20MHz
Delay ripple	≤1.0ns@通带内任意102MHz
Work Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

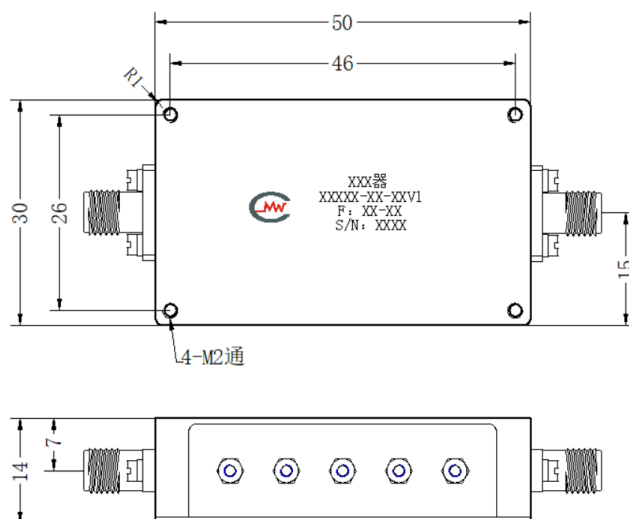

Note

- Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.