

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband frequency C1	/	/	600	~	960	MHz
Passband frequency C2	/	/	1200	~	3000	MHz
Passband IL	/	/			1.8	dB
Passband C1 Rejection	1200-3000	MHz $\geq$	60			dB
Passband C2 Rejection	DC-960	MHz $\geq$	60			dB
Channel isolation	600-960&1200-3000	MHz $\geq$	60			dB
Passband VSWR	/	/			1.6	



Other parameters

Connector	SMA-F
Connector material	Housing 304 stainless steel
Impedance	50 Ω
Surface	White
Power Capacity	10W Design assurance
Storage Temp.	-10~+55°C Design assurance


Reference picture



Configuration(mm)

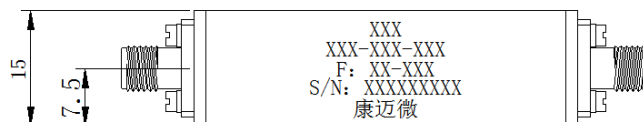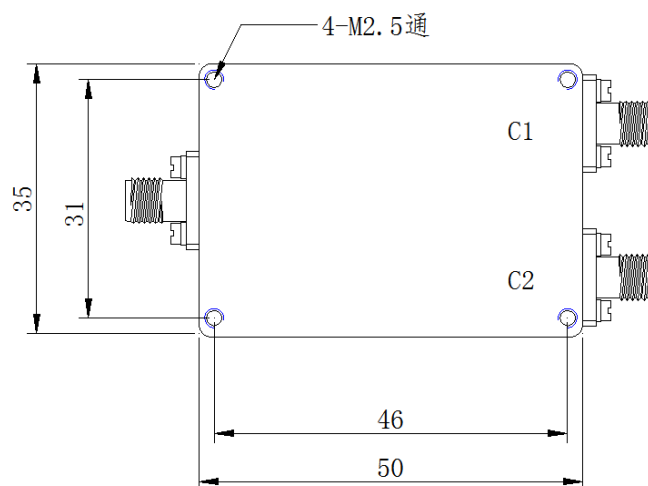

Typical test curve

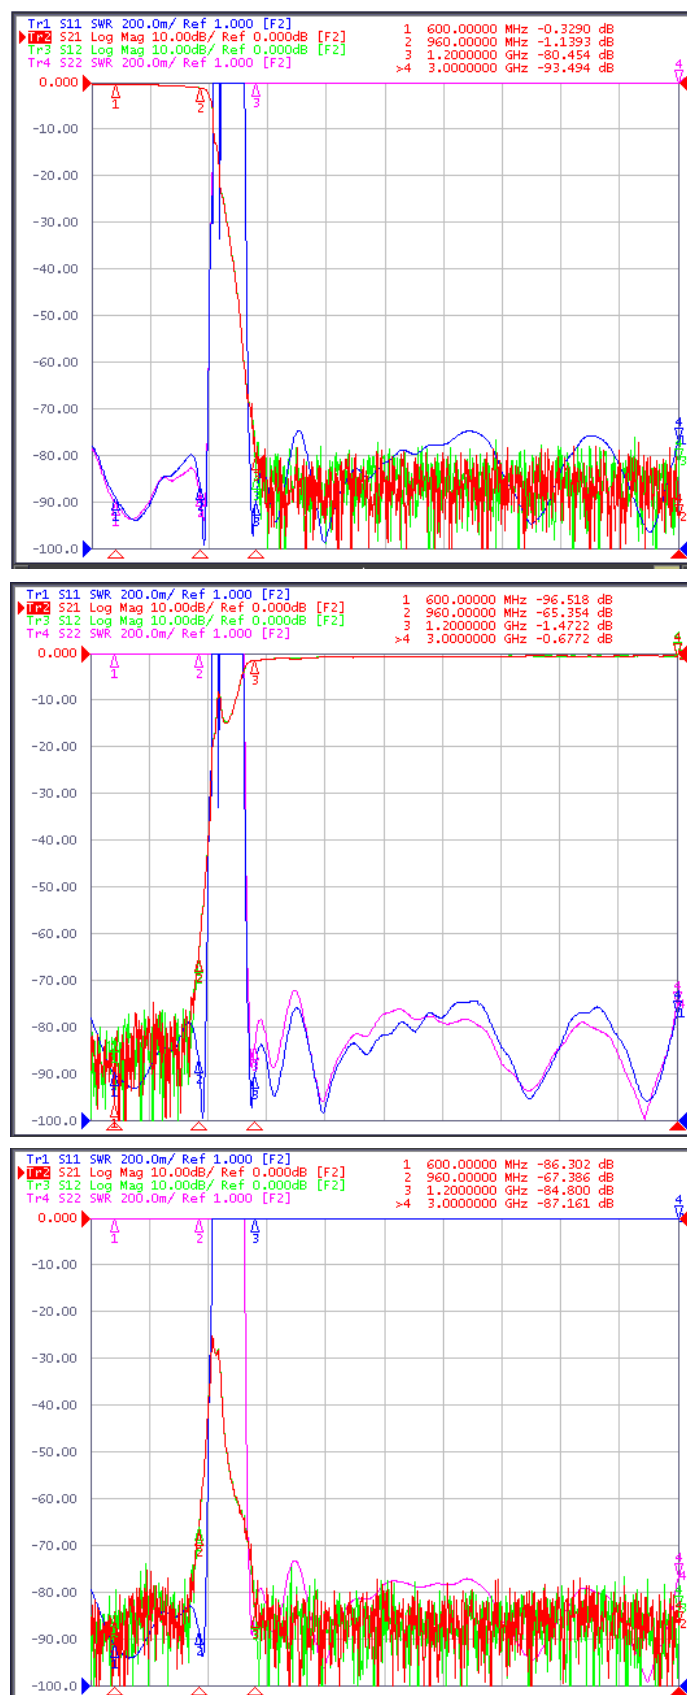

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.