

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	750	~	960	MHz
Passband F2	/	/	1800	~	2200	MHz
Passband F3	/	/	2600	~	2700	MHz
Passband IL	/	/			1	dB
Ripple	/	/			0.8	dB
Passband VSWR	/	/			1.5	
Isolation			30			dB


Other parameters

Connector	SMA-F
Impedance	50Ω
Surface	Grey
Power Capacity	30W Design assurance
Operation Temp.	-20~+60°C Design assurance

Port Definition

1	Common port	ANT
2	Passband 1	C
3	Passband 2	B
4	Passband 3	A

Configuration(mm)

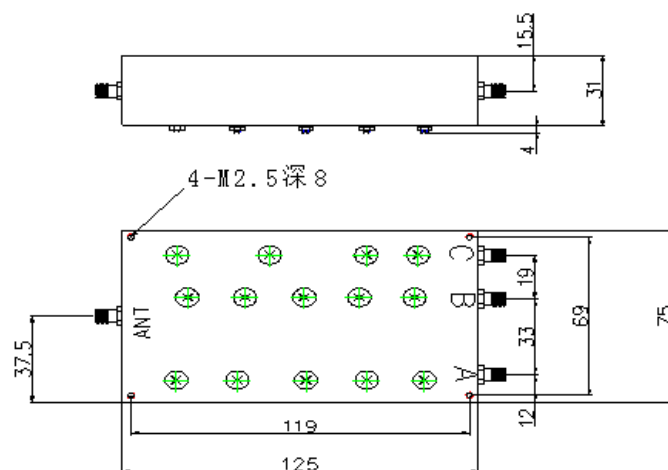

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 1 If the temperature is higher than 125°C, consult with us before ordering.