



Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	16.9	~	17.4	GHz
Passband IL	/	/			3	dB
Ripple	/	/			2	dB
Rejection	DC-16.85	GHz $\geq$	35			dBc
Rejection	17.7-20	GHz $\geq$	35			dBc
Rejection	17.5	GHz $\geq$	25			dBc
Passband VSWR	/	/			1.5	

Configuration(mm)

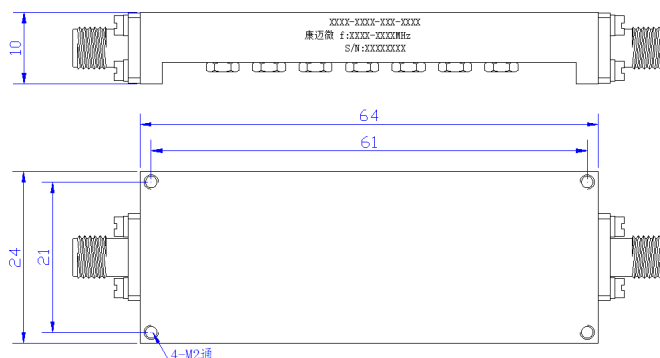


Typical test curve

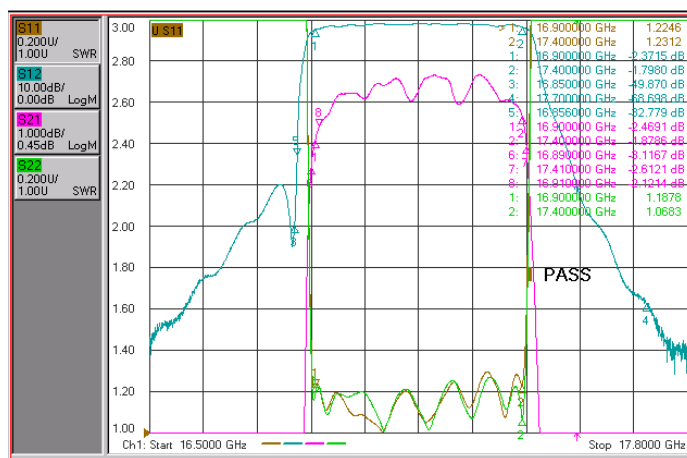

Other parameters

Connector	SMA-F
Impedance	50 Ω
Surface	Black
Power Capacity	5W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade

Functional diagram

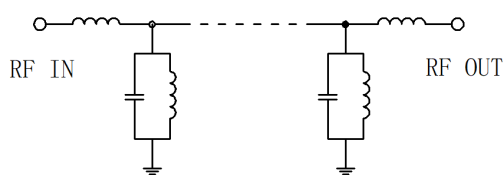

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.