

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	9	~	11	MHz
Passband IL	/	/			2.5	dB
Ripple	/	/			1.0	dB
Rejection	DC-3	MHz $\geq$	70			dB
Rejection	17-400	MHz $\geq$	70			dB
Passband VSWR	/	/			1.5	


Other parameters

Connector	SMA-K
Connector material	Housing 304 stainless steel
Impedance	50 Ω
Surface	White
Power Capacity	5W Design assurance
Operation Temp.	-10~+65°C Design assurance


Reference picture



Configuration(mm)

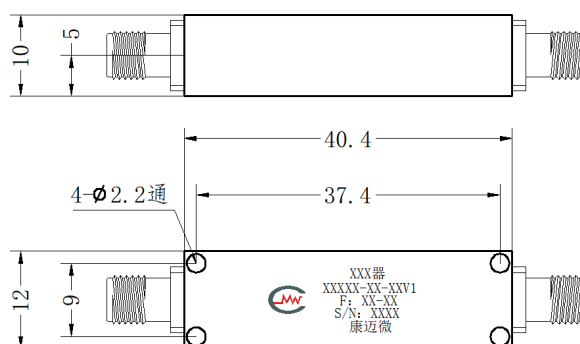

Typical test curve

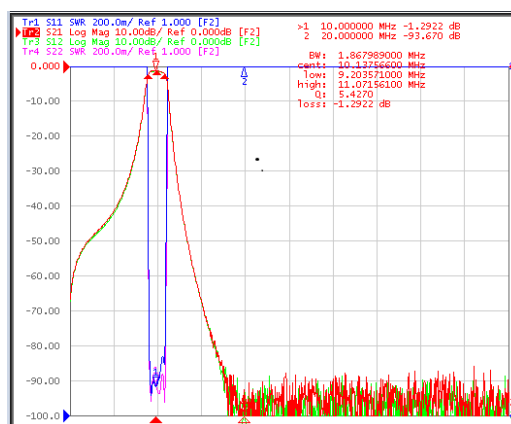

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.