


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	21300	~	22300	MHz
Passband IL	/	/			3.0	dB
Rejection	1300-2300	MHz $\geq$	60			dBc
Rejection	24900-25900	MHz $\geq$	40			dBc
Rejection	23100	MHz $\geq$	30			dBc
Rejection	21000	MHz $\geq$	10			dBc
Passband VSWR	/	/			1.5	


Other parameters

Connector	Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	1W Design assurance
Operation Temp.	-55~+70°C
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

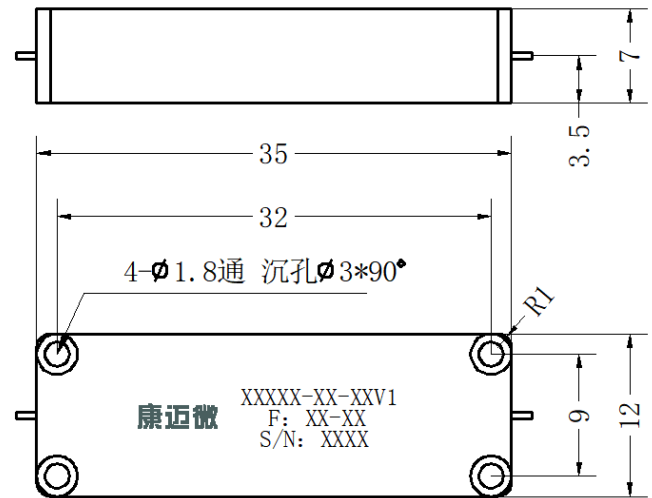

Typical test curve

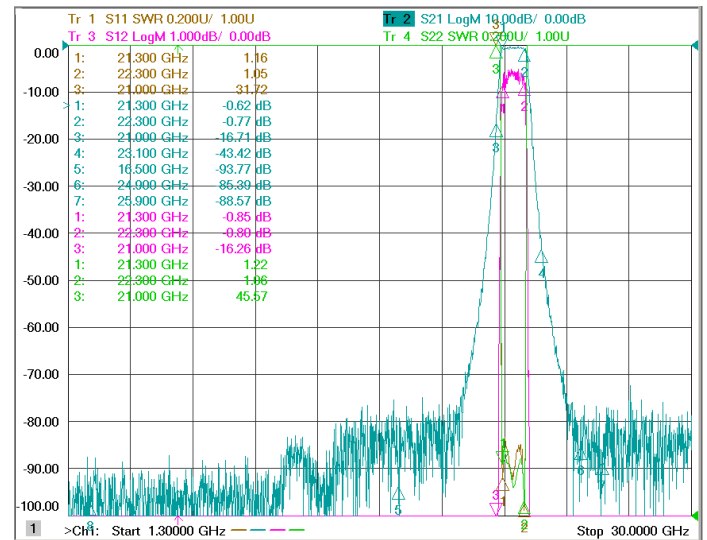

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.