


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	3	~	1000	MHz
Clipping level			10	dBm
IL			0.8	dB
VSWR			1.5	

Other parameters

Power Capacity	46dBm,脉宽 3ms,35%占空比设计保证设计保证
Impedance	50Ω
Connector	SMA-K
Operation Temp.	-45~+75°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Other	Attenuation of HPM greater than 30dB for 5KV

Configuration(mm)

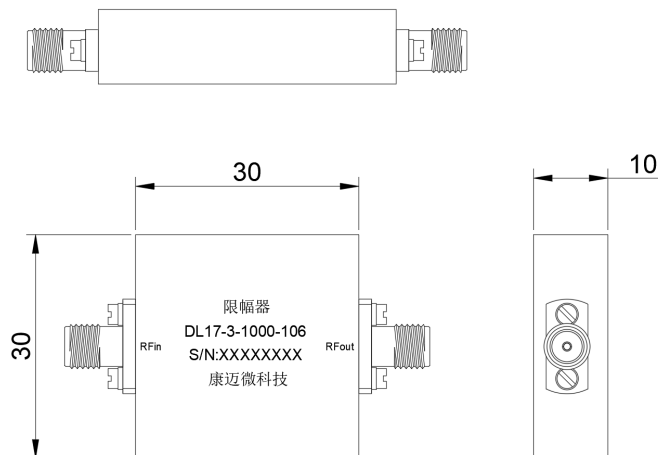

Typical test curve



Note

1, Pay attention to the direction of input and output, reverse connection may cause the product to burn out.