


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband frequency ANT1	/	/	4.8	~	5	GHz
Passband frequency ANT2	/	/	4.8	~	5	GHz
Passband IL	/	/			1	dB
Ripple	/	/			0.6	dB
Rejection	DC~4.75	GHz $\geq$			65	dB
Rejection	2-2.4	GHz $\geq$			90	dB
Rejection	5.05~15	GHz $\geq$			65	dB
Passband VSWR	/	/			1.5	

Configuration(mm)

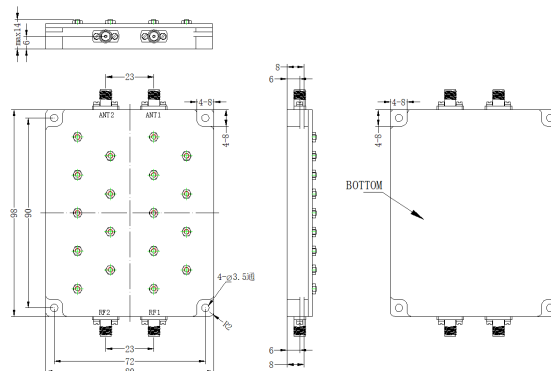

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.

Other parameters

Connector	SMA-K
Connector material	Stainless steel
Impedance	50 Ω
Surface	Color conductive oxidation
Power Capacity	20W
Operation Temp.	-40~+85°C Design assurance
Storage Temp.	-40~+85°C Design assurance
Quality Grade	Industrial grade
other	ISO: 90dB