

Product features

low loss.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	32.9	~	50.1	GHz
IL			0.3	dB
VSWR			1.2	


Other parameters

Power	20W Design assurance
Waveguide model	Rect waveguider
Waveguide shape	straight waveguide
Connector 1	BJ400
Connector 2	BJ400
Surface	Silver plating
Work Temp.	-40~+70°C Design assurance

Reference picture



Configuration(mm)

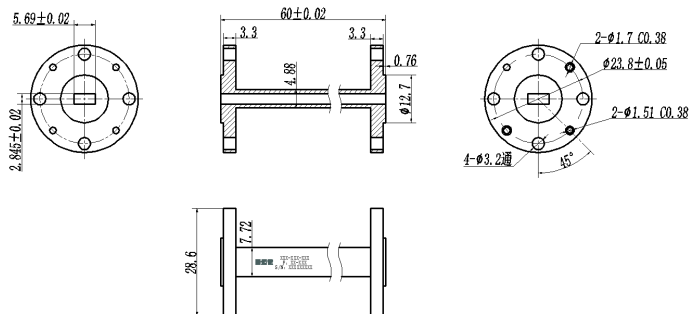

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.