


Main specifications

Parameters	Frequency		Min	Typical	Max	Units
Passband			220	~	300	MHz
Passband IL					2.50	dB
Rejection	70-150	MHz≥	60			dBc
Rejection	400-1100	MHz≥	60			dBc
Passband VSWR					1.50	

Other parameters

Connector	SMA-K
Impedance	50Ω
Surface	silver-plate
Power Capacity	2W
Product shell material	Aluminium
Operation Temp.	-55~+85°C

Configuration(mm)

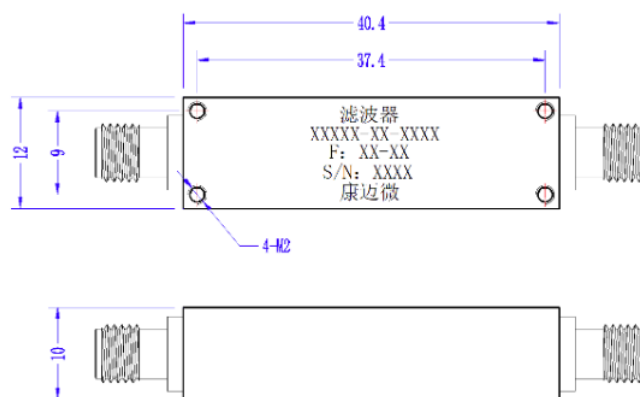

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.