

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	10	~	10000	MHz
IL		1.5		dB
Isolation		20		dB
Main line VSWR		1.3		
feed-voltage		15		V
Feed current		500		mA


Other parameters

Connector	SMA-K
Connector material	Stainless steel
Feed interface	Microstrip needle
Impedance	50Ω
Surface	Gold-plating
Power	5W RF power
Work Temp.	-40~+85°C Design assurance



Reference picture



Configuration(mm)

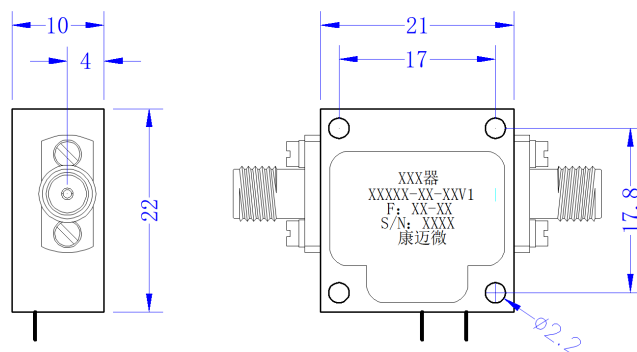

Typical test curve

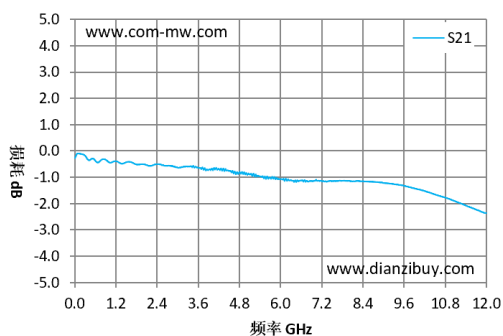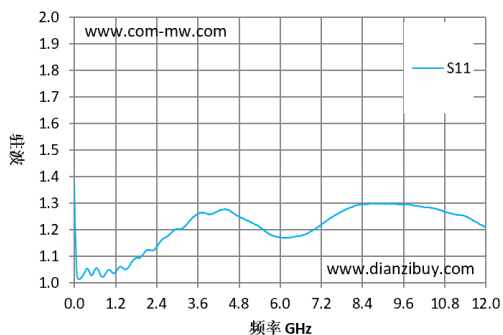

Note

- 1 Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- 2 If the temperature is higher than 125°C, consult with us before ordering.