


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	7700	~	9000	MHz
Passband IL	/	/			1.5	dB
Ripple					0.6	dB
Ripple	Any 1	GHz			0.5	dB
Rejection	DC-6.8	GHz $\geq$	90			dBc
Rejection	6.8-7.3	GHz $\geq$	70			dBc
Rejection	10-19.5	GHz $\geq$	95			dBc
Passband VSWR	/	/			1.35	


Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Delay ripple	$\leq$ 2ns
Operation Temp.	-55~+85°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

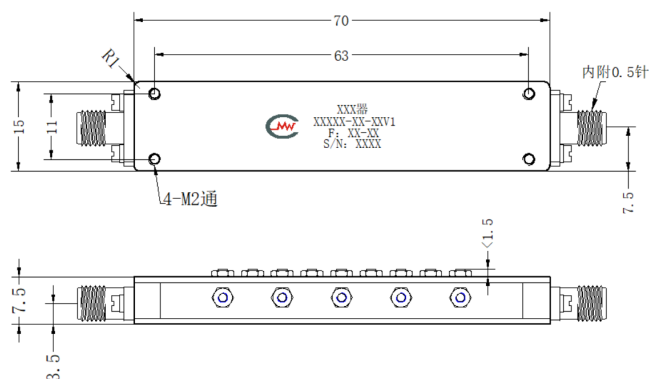

Typical test curve

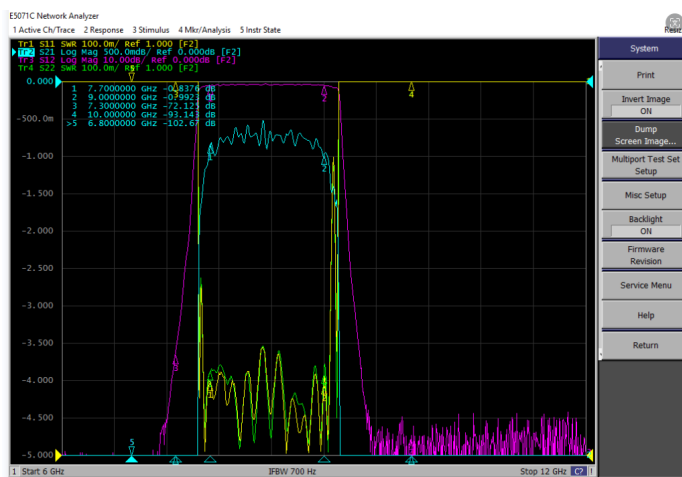

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.