

Product features

It has characteristics such as medium gain, wide operating frequency band, and good performance consistency within the operating frequency band.


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	30	~	3000	MHz
Gain	-12	6		dBi
VSWR		2	8	

Other parameters

Polarization	Linear polarization
Power Capacity	200W Design assurance
Connector	N-K
Outline size	1630*1690*580mm
Estimated weight	5Kg without bracket
Surface	Brown green baking paint
Operation Temp.	-25~+55°C Design assurance
Storage Temp.	-40~+60°C Design assurance


Configuration(mm)

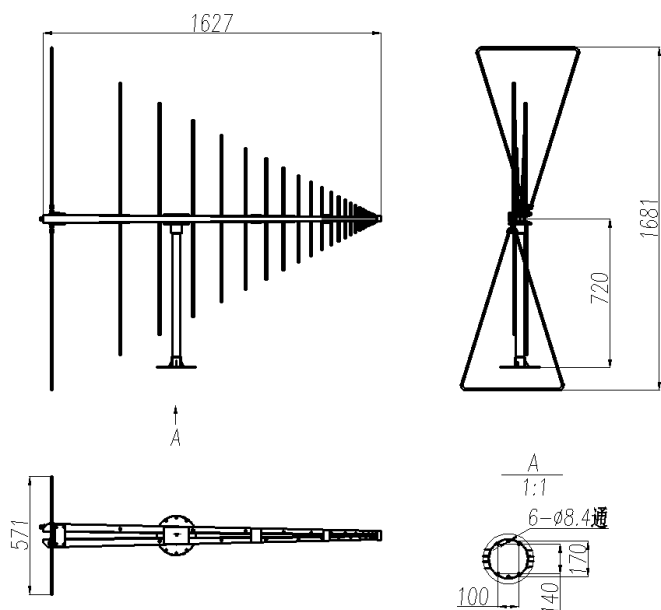

Reference picture



Typical test curve

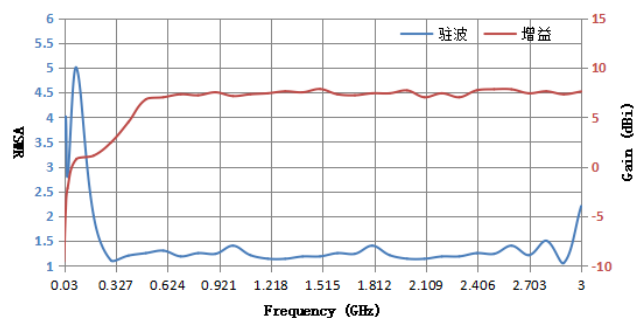

Note

Private disassembly by unprofessional personnel may worsen or even broken the antenna.

Make sure no obstacle or high electromagnetic radiation appears near the antenna.

It is strictly prohibited to install and use antenna in the thunderstorm outside, and the lightning protection facilities are necessary.

Please do not discard the antenna casually since it contains electronic components.