


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	point frequency	/		93.3		MHz
Passband IL	/	/			3	dB
Rejection	DC-50	MHz $\geq$	40			dB
Rejection	180-500	MHz $\geq$	45			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMD
Impedance	50 Ω
Power Capacity	2W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade


Functional diagram

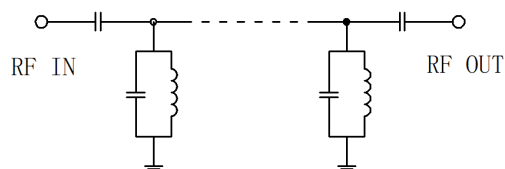

Reference picture



Configuration(mm)

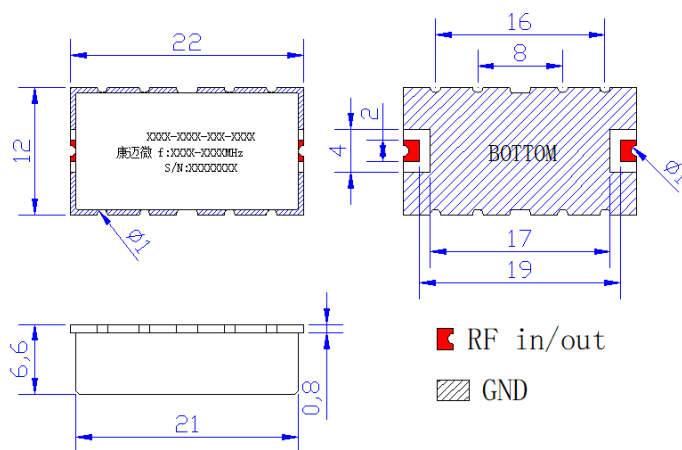

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- The product supports 190 °C reflow soldering