


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	8300	~	11000	MHz
Passband IL	/	/			0.9	dB
Ripple	/	/			0.7	dB
Rejection	DC-7500	MHz $\geq$	50			dBc
Rejection	11800-20265	MHz $\geq$	46			dBc
Passband VSWR	/	/			1.7	


Other parameters

Connector	Pin 0.38mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance

Functional diagram

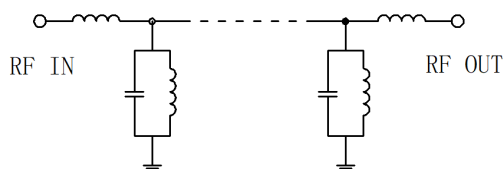

Configuration(mm)

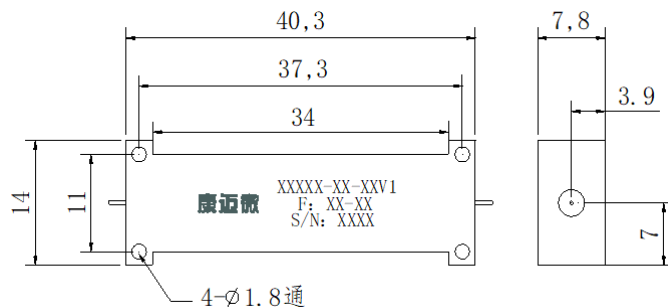

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.