

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	3.5	~	5	GHz
IL			0.2	dB
Coupling	39	40	41	dB
Coupling flatness			± 0.3	dB
Directivity	18			dB
Main line VSWR			1.3	
Coupled line VSWR			1.4	


Other parameters

Connector	Pin
Impedance	50 Ω
Surface	Conductive oxidation
Power Capacity	200W Design assurance
Shell Material	Aluminium
Operation Temp.	-40~+70°C Design assurance

Port Definition

Input port	IN	Pin $\phi 1.2$
Output port	OUT	Pin $\phi 1.2$
Coupling port	C1	SMA-K
Isolated Port	C2	SMA-K

Configuration(mm)

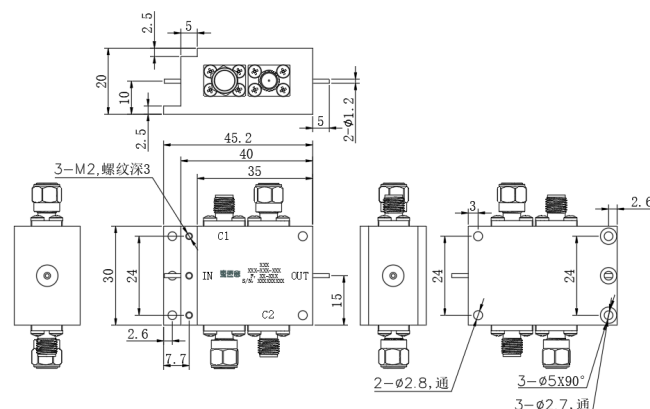

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.