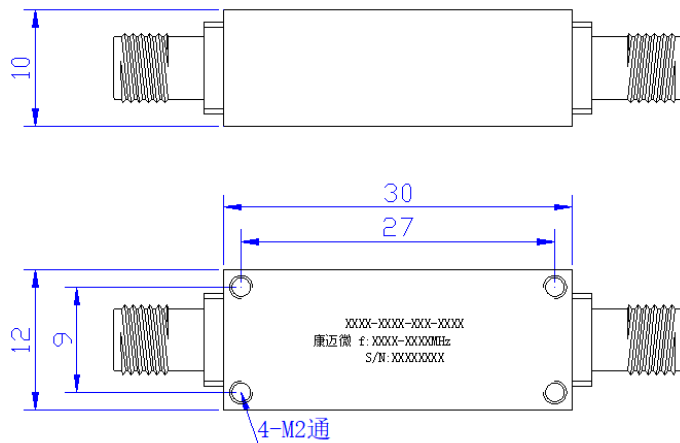
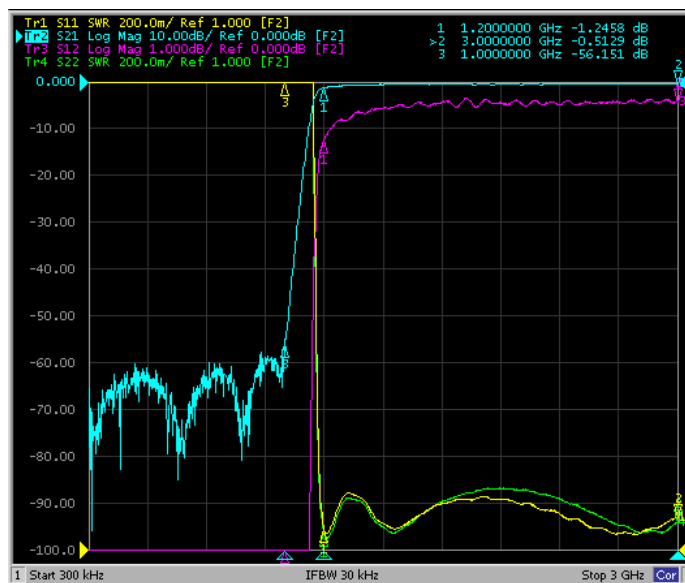


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1200	~	3000	MHz
Passband IL	/	/			3	dB
Rejection	DC-1000	MHz $\geq$	50			dBc
Passband VSWR	/	/			1.3	

Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	silver-plate
Power Capacity	1W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade

Functional diagram**Reference picture****Configuration(mm)****Typical test curve****Note**

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.