

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	5345	~	5455	MHz
Passband IL	/	/			2.5	dB
Ripple	/	/			0.5	dB
Rejection	DC-5.15	GHz $\geq$	65			dBc
Rejection	5.65-11	GHz $\geq$	65			dBc
Passband VSWR	/	/			1.50	
Return loss	/	/				dB


Other parameters

Connector	Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Product shell material	Aluminium
Operation Temp.	-45~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance


Reference picture



Configuration(mm)

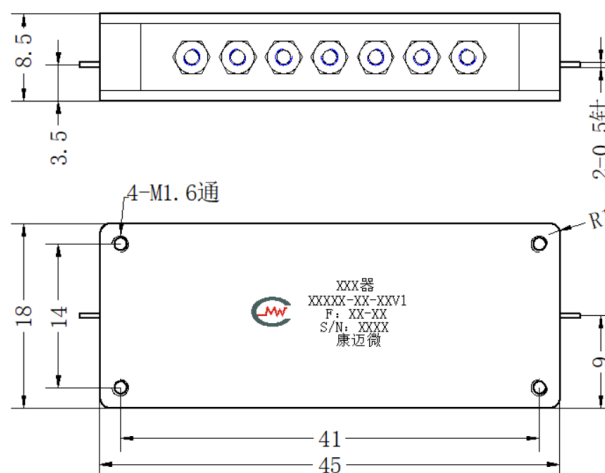

Typical test curve

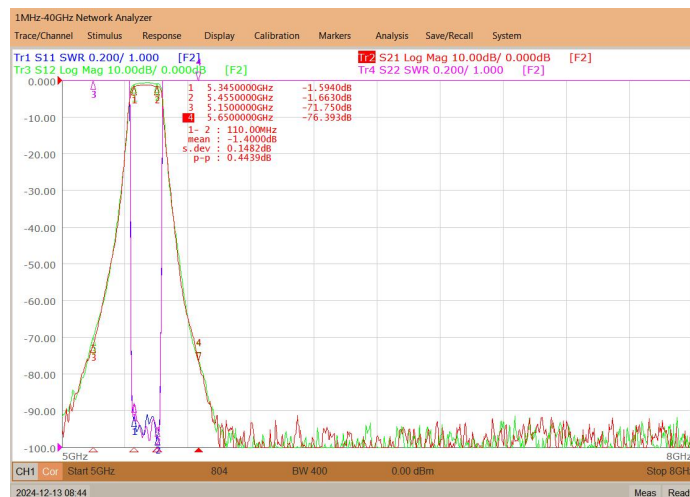

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.