


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	30	~	2500	MHz
Passband VSWR	30-512	MHz			2	
Passband VSWR	500-2500	MHz			1.6	
Passband IL					4	dB
Isolation	30-512	MHz ≥	3			dB
Isolation	500-2500	MHz ≥	15			dB

Other parameters

Connector	N -50
Power Capacity	2W Design assurance
Operation Temp.	-40~+70°C Design assurance

Configuration(mm)

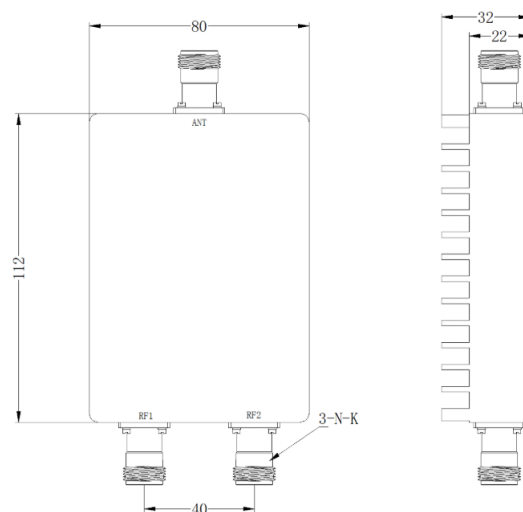

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.