

Main specifications

Parameters	/	Min	Typical	Max	Units
Stopband F		1574.42	~	1576.42	MHz
Stopband Rej.	≥	80			dB
Passband		DC	~	1545.42	MHz
Passband		1605.42	~	2600	MHz
Passband IL				1	dB
Passband VSWR				1.5	


Other parameters

Connector	N -F
Impedance	50Ω
Surface	Black baking paint
Power Capacity	100W Design assurance
Storage Temp.	-10~+50°C Design assurance

Reference picture




Configuration(mm)

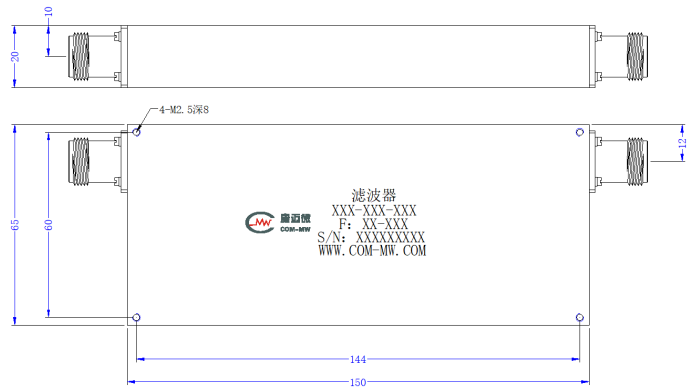

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Typical test curve

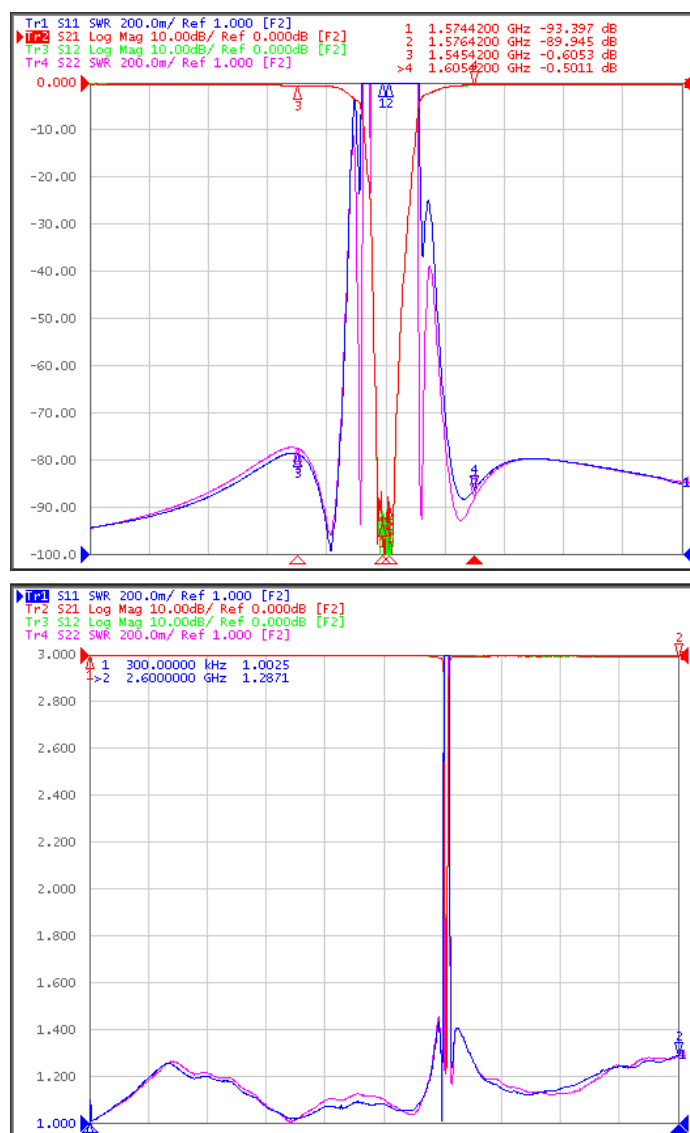

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.