

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	1	~	40	GHz
IL			5.3	dB
Dual Directional coupling	9	10	11	dB
Coupling Sensitivity		± 2		dB
Directivity		10		dB
Main line VSWR			1.7	
Coupled line VSWR			1.8	


Other parameters

Connector	2.92-F
Connector material	Stainless steel
Impedance	50Ω
Power Capacity	10W Design assurance
Operation Temp.	-40~+85°C Design assurance
Quality Grade	Industrial grade

Reference picture



Configuration(mm)

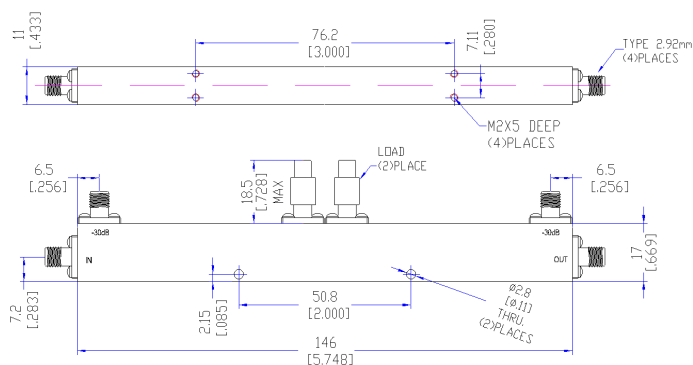

Note

- | | |
|---|--|
| 1 | Clean the surface of the product, do not soak the product in cleaning solution for cleaning. |
| 2 | If the temperature is higher than 125°C, consult with us before ordering. |

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.