

Product features

High power, Low VSWR.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	17.6	~	26.7	GHz
VSWR			1.2	


Other parameters

Power Capacity	200W Design assurance
Connector	Waveguide
Waveguide port	BJ220
Surface	Conductive oxidation
Product shell material	Aluminium
Operation Temp.	-55~+85°C Design assurance

Reference picture



Configuration(mm)

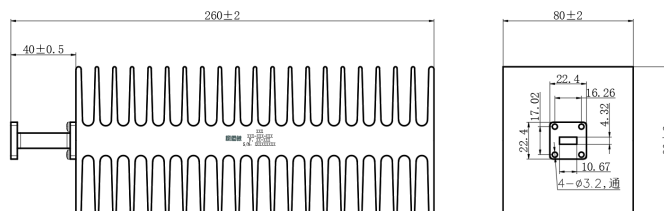

Note

Heat dissipation space is needed for installing the load, far away from the equipment with large heat output