

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	1.65	~	1.75	GHz
IL			0.5	dB
Isolation	20			dB
VSWR			1.3	
Amplitude balance			± 0.2	dB
Phase balance			± 4.5	°


Other parameters

Power	8W设计保证（连续波）
Phase	180° Hybrid
Connector	Microstrip pad
Work Temp.	-55~+85°C Design assurance

Port Definition

IN	差	和	---	---
ISO	和	差	---	---
OUT1	1 (0°)	1 (0°)	---	---
OUT2	2 (-180°)	2 (0°)	---	---

Configuration(mm)

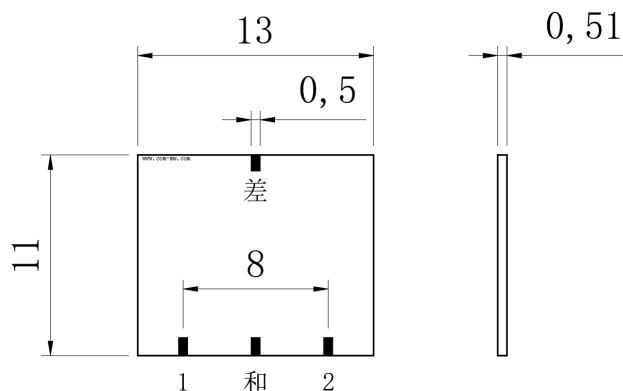

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
2	产品背面镀金，支持220°锡焊
3	产品用金丝、金带键合，键合温度 $\leq 150^{\circ}\text{C}$