

Product features

Low noise

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	11.75	~	12.75	GHz
Gain	60			dB
Gain flatness			±1	dB
Noise figure			1.3	dB
VSWR			1.8	
P-1dB	5			dBm


Other parameters

Connector	SMA-K
Connector material	Stainless steel
Impedance	50Ω
Surface	Gold-plating
Working voltage	+12V
Working current	300mA
Operation Temp.	-40~+70°C Design assurance
Power supply interface	SMA connector power supply

Reference picture



Configuration(mm)

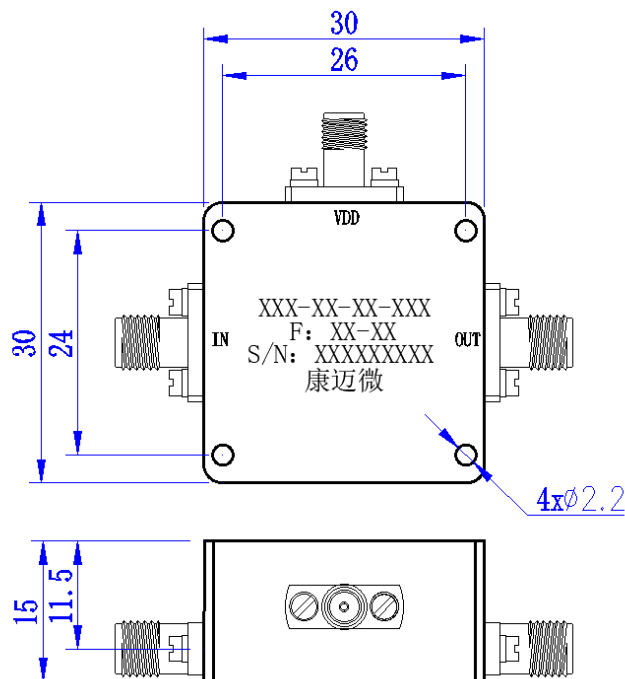

Note

Store in an environment with a humidity of less than 25% and pay attention to dust and static electricity prevention.