

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	6.6	~	11.4	GHz
Passband IL	/	/			3.0	dB
Ripple	/	/			0.5	dB
Rejection	DC-5.5	GHz $\geq$	50			dBc
Rejection	12.5-15	GHz $\geq$	40			dBc
Rejection	15-20	GHz $\geq$	50			dBc
Passband VSWR	/	/			1.50	


Other parameters

Connector	Pin 0.38mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+95°C Design assurance


Reference picture



Configuration(mm)

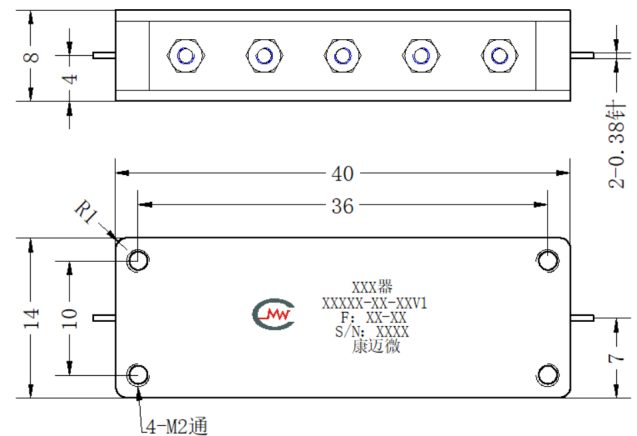

Typical test curve

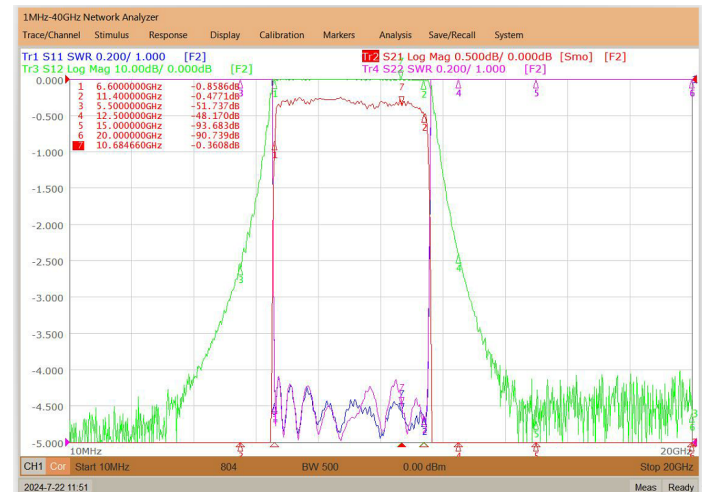

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.