

Product features

Low VSWR.


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	4640	~	7050	MHz
VSWR		1.05		

Other parameters

Power	2W
Connector	Waveguide
Waveguide port	BJ58
Waveguide flange	FEP
Surface	Black
Product shell material	Aluminium
Work Temp.	-40~+85°C Design assurance


Typical test curve

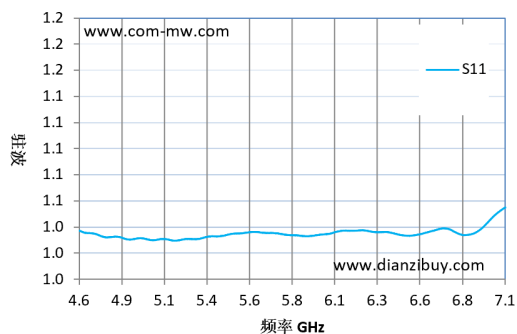

Reference picture



Configuration(mm)

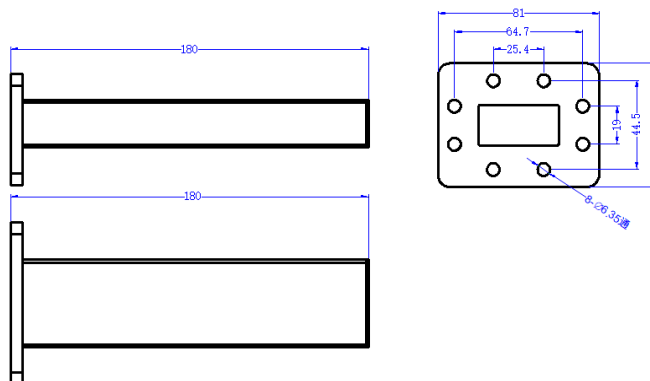

Note

Heat dissipation space is needed for installing the load, far away from the equipment with large heat output