

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/		10		GHz
Passband IL	/	/			3.0	dB
Rejection	$F0 \pm 100$	MHz $\geq$	15			dBc
Rejection	$F0 \pm 2.5$	GHz $\geq$	90			dBc
Passband VSWR	/	/			1.5	


Other parameters

Connector	Pin 0.38mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Product shell material	Copper
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance


Reference picture



Configuration(mm)

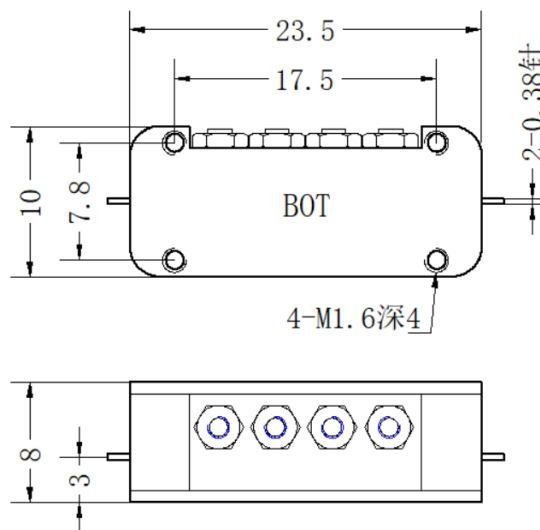

Typical test curve

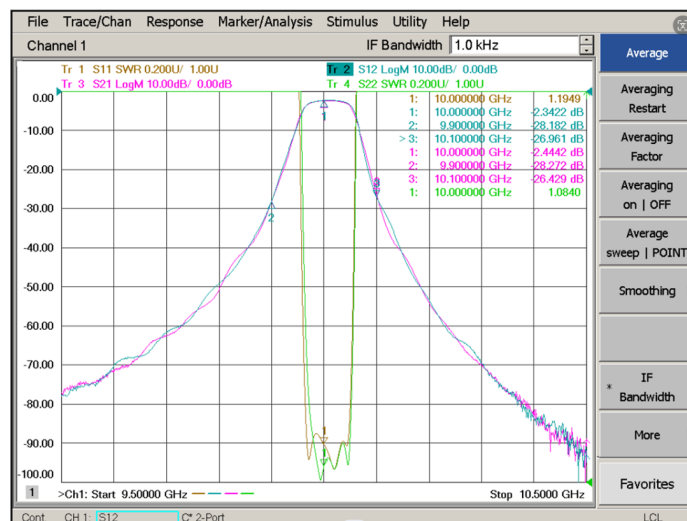

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.