

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	2400	~	2600	MHz
Passband IL	/	/			1.0	dB
Ripple	/	/			0.6	dB
Rejection	DC-1400	MHz $\geq$	60			dB
Rejection	3300-8000	MHz $\geq$	60			dB
Passband VSWR	/	/			1.50	


Reference picture




Other parameters

Connector	MCX-F or K
Impedance	50 Ω
Surface	silver-plate
Power Capacity	30W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Other	ST-F-C2500-200-3645

Configuration(mm)

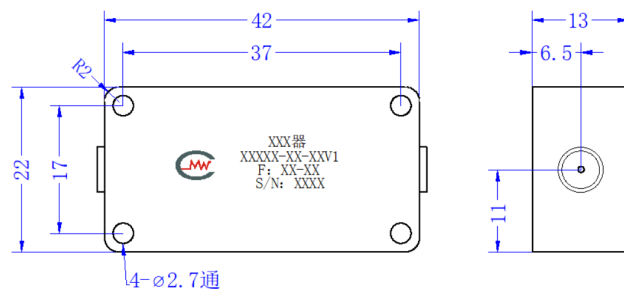

Typical test curve

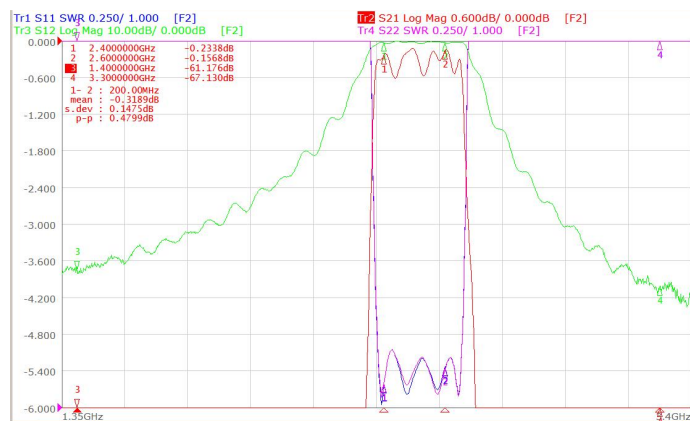

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.
- 3 /