


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	950	~	1050	MHz
Passband IL	/	/			2	dB
Ripple	/	/			1	dB
Rejection	DC-600	MHz $\geq$	60			dBc
Rejection	1400-2000	MHz $\geq$	60			dBc
Return loss	/	/	14			dB

Configuration(mm)

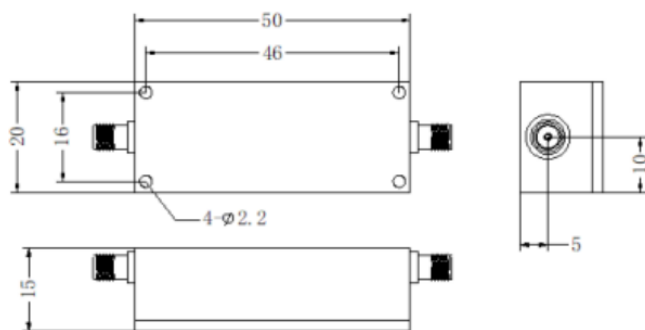

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.