


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1669	~	1979	MHz
Passband IL	/	/			2.5	dB
Ripple	/	/			1.0	dB
Rejection	DC-1524	MHz $\geq$	40			dBc
Rejection	1624	MHz $\geq$	10			dBc
Rejection	2024	MHz $\geq$	10			dBc
Rejection	2124-3000	GHz $\geq$	50			dBc
Passband VSWR	/	/			1.5	

Configuration(mm)

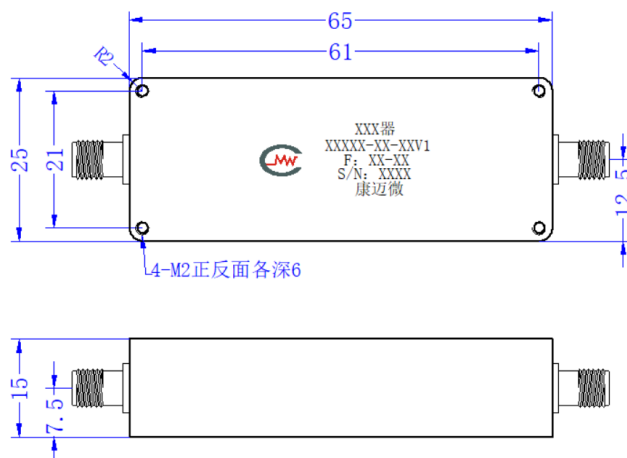

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.

Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Bandwidth	-1dB $\geq$ 310MHz
Bandwidth	-3dB $<$ 350MHz
Delay ripple	$\leq$ 15ns@f0 $\pm$ 25MHz
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance