


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	750	~	875	MHz
Passband IL	/	/			2	dB
Flatness in band	/	/			1	dB
Rejection	DC-440	MHz $\geq$	70			dB
Rejection	1050-4000	MHz $\geq$	70			dB
Passband VSWR	/	/			1.8	

Configuration(mm)

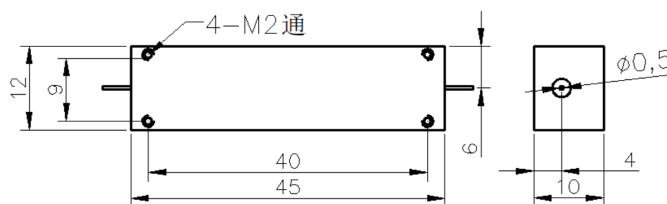

Other parameters

Connector	微带针 $\varnothing$ 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Operation Temp.	-40~+70°C Design assurance