


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	30	~	50	MHz
Passband IL	/	/			2.0	dB
Rejection	DC-15	MHz $\geq$	40			dB
Rejection	65-300	MHz $\geq$	40			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-K
Connector material	Housing 304 stainless steel
Impedance	50 Ω
Surface	White
Operation Temp.	-40~+70°C Design assurance

Configuration(mm)

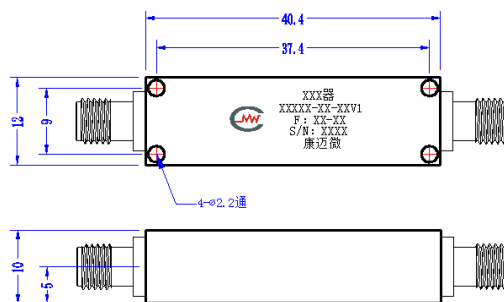

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.