

Product features

It has the characteristics of wide bandwidth, low sidelobes, and high efficiency.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	0.8	~	2	GHz
Gain	10			dBi
VSWR		1.5		
AR		2.0		dB
Polarization isolation	15			dB


Reference picture



Other parameters

Polarization	Right-handed circular polarization
Connector	N-K
Power Capacity	50W Design assurance
Outline size	410*410*700mm
Estimated weight	11Kg
Surface	Sea gray
Operation Temp.	-25~+55°C Design assurance
Storage Temp.	-45~+75°C Design assurance

Configuration(mm)

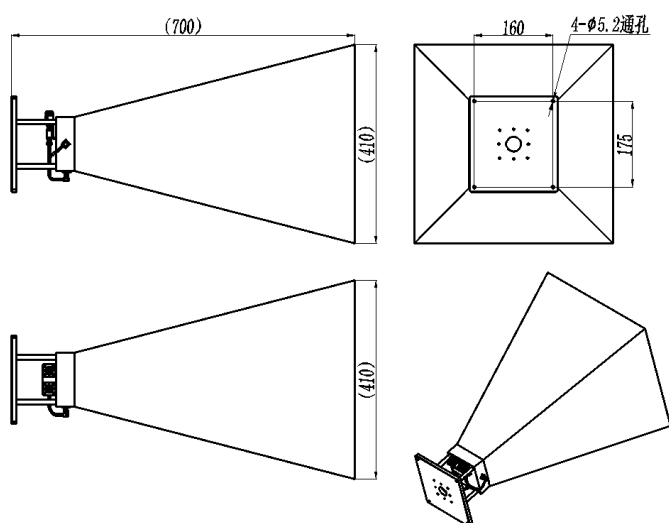

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Note

Avoid collisions during installation.

It is strictly prohibited to disassemble antenna accessories, as it may cause poor antenna performance.

The installation position of the antenna should be free of any obstacles.

Outdoor use should be equipped with lightning protection facilities.

May contain electronic components, please do not dispose of them randomly.