


Main specifications

Parameters			Min	Typical	Max	Units
Passband			225	~	325	MHz
Passband IL					1.50	dB
Passband VSWR					1.50	
Rejection	DC-175	MHz $\geq$	35			dBc
Rejection	375-450	MHz $\geq$	35			dBc
Rejection	450-2200	MHz $\geq$	50	55		dBc
Ripple					1.0	dB

Reference picture



Configuration(mm)

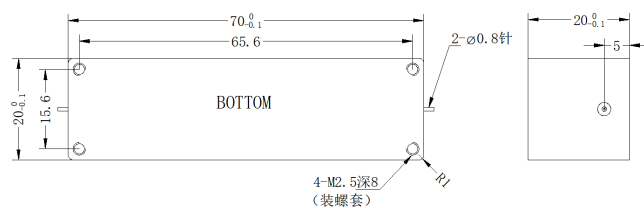

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.
- 3 Good grounding, please keep the installation surface flat

Other parameters

Connector	Pin 0.8mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	120
Product shell material	Aluminium
Operation Temp.	-40~+85°C
Storage Temp.	-50~+100°C