


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	20	~	21.2	GHz
Passband IL	/	/			1.5	dB
Ripple	/	/			0.6	dB
Rejection	DC-18.1	GHz $\geq$	80			dBc
Rejection	18.1-19.1	GHz $\geq$	60			dBc
Rejection	22.1-27	GHz $\geq$	60			dBc
Passband VSWR	/	/			1.5	


Other parameters

Connector	Pin 0.38mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade


Functional diagram

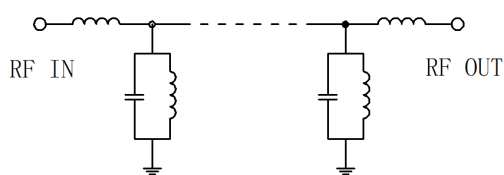

Configuration(mm)

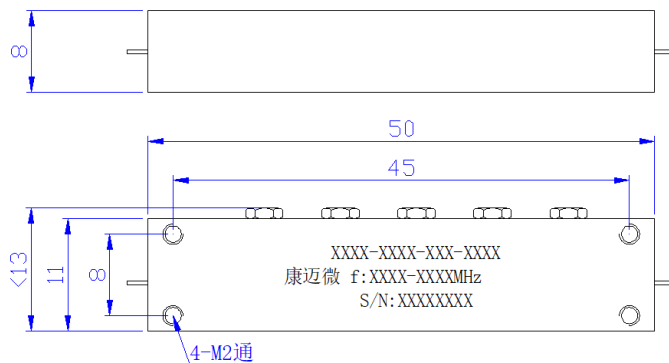

Typical test curve

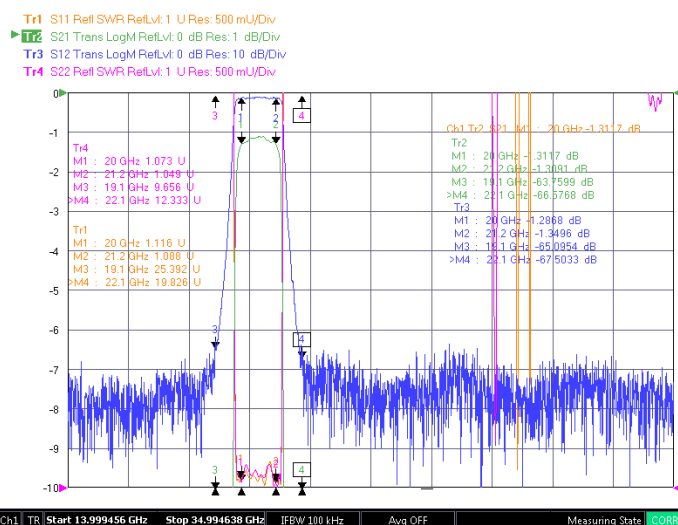

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.