


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	5400	~	6500	MHz
Passband IL	/	/			2.5	dB
Ripple	/	/			1.2	dB
Rejection	6600-6800	MHz $\geq$	35			dBc
Rejection	6800-8000	MHz $\geq$	40			dBc
Rejection	DC-5000	MHz $\geq$	40			dB
Passband VSWR	/	/			1.6	

Reference picture




Configuration(mm)

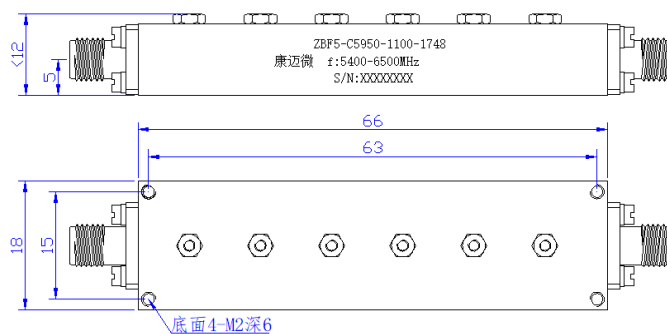


Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	Black
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade

Typical test curve

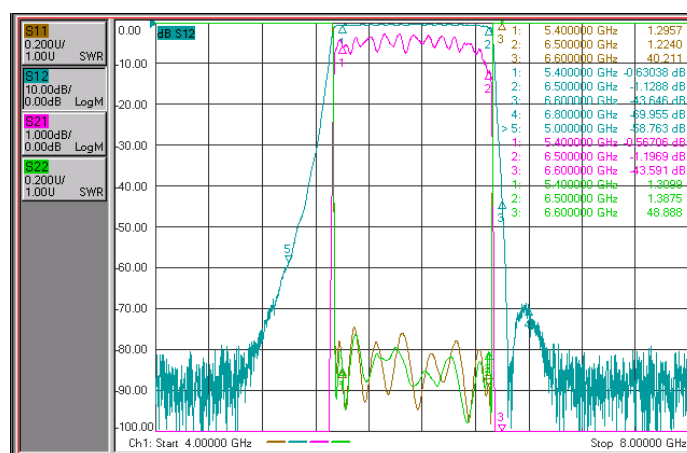

Functional diagram

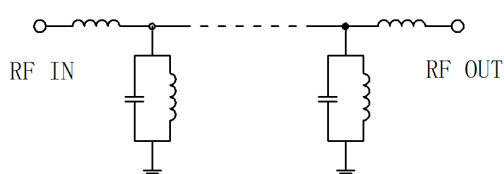

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.