


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	2310	~	2370	MHz
Center loss	/	/		2.0		dB
Rejection	2287	MHz $\geq$	60			dBc
Rejection	2393	MHz $\geq$	60			dBc
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	Black

Configuration(mm)

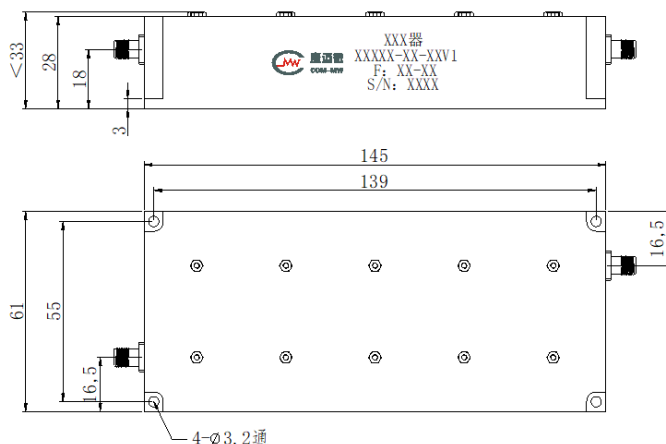

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.