


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	850	~	960	MHz
Passband IL	/	/			4.0	dB
Ripple	/	/			1.0	dB
Rejection	DC-765	MHz $\geq$	30			dB
Rejection	1056-1926	MHz $\geq$	30			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	1W Design assurance
Product shell material	Copper
Operation Temp.	-40~+70°C
Storage Temp.	-55~+85°C Design assurance


Functional diagram

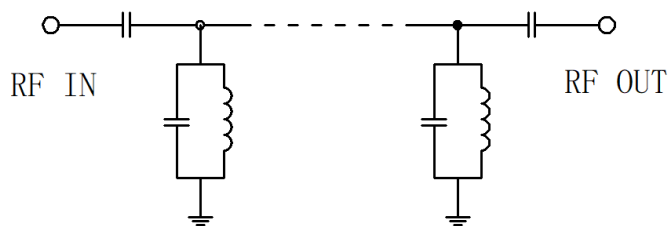

Reference picture



Configuration(mm)

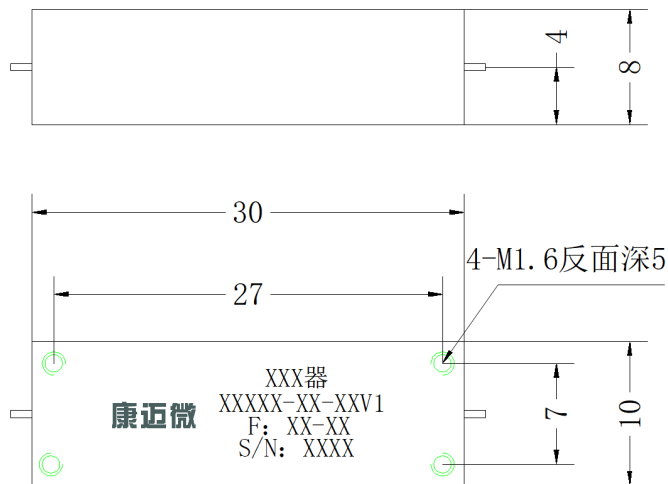

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.
- 3 /