

Main specifications

Parameters	/	Min	Typical	Max	Units
Stopband F		88	~	108	MHz
Stopband Rej.	$\geq$	35			dBc
Passband		DC	~	80	MHz
Passband		120	~	1300	MHz
Passband IL				2.0	dB
Passband VSWR				1.50	


Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	silver-plate
Power Capacity	1W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance


Reference picture



Configuration(mm)

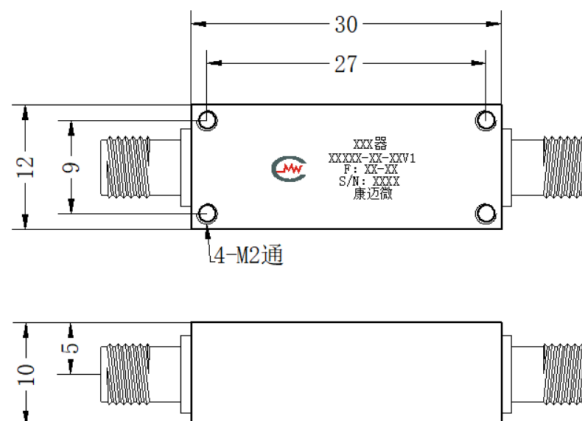

Typical test curve

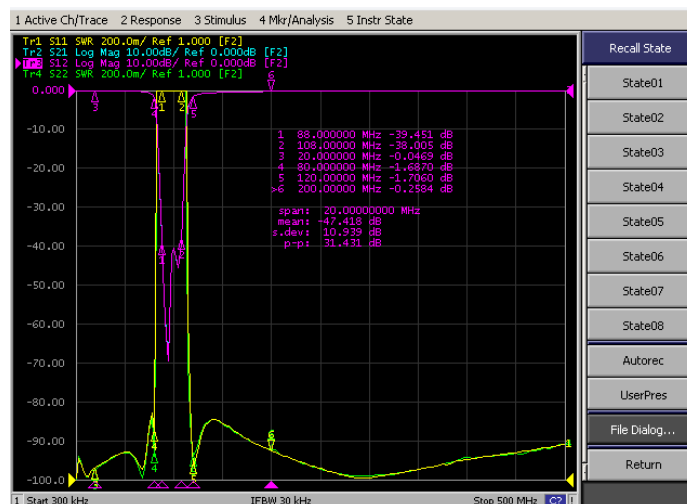

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.