


Main specifications

Parameters	Frequency		Min	Typical	Max	Units
Passband			578	~	606	MHz
Passband IL					2.5	dB
Ripple					1.5	dB
Rejection	$f_0 \pm 60$	MHz $\geq$	40			dB
Passband VSWR					1.5	

Other parameters

Connector	MCX-K
Impedance	50Ω
Surface	Silver plating
Power	5W Design assurance
Product shell material	Aluminium
Work Temp.	-40~+70°C

Configuration(mm)

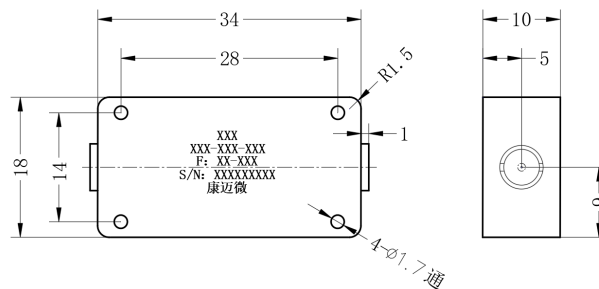

Note

- 1 Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- 2 If the temperature is higher than 125°C, consult with us before ordering.