

Product features

Broadband, high-power.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	2000	~	8000	MHz
IL			0.6	dB
Coupling	38.5		41.5	dB
Directivity	15			dB
Main line VSWR			1.3	
Coupled line VSWR			1.5	

Other parameters

Connector	N -K
Impedance	50Ω
Surface	Conductive oxidation
Power Capacity	20W Design assurance
Operation Temp.	-40~+70°C Design assurance


表格标题

Input port	IN	---
Output port	OUT	---
Coupling port	-40dB	---

Reference picture



Configuration(mm)

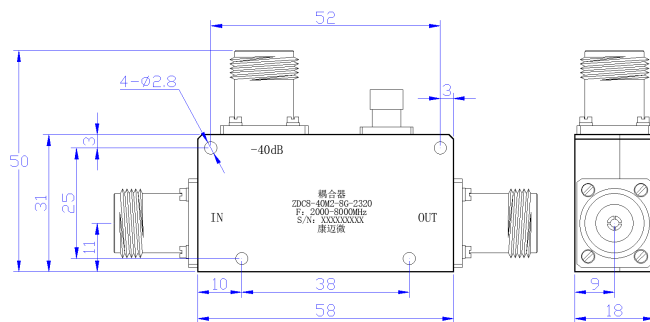

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.