


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1420	~	1530	MHz
Passband IL	/	/			1.0	dB
Ripple	/	/			0.5	dB
Rejection	DC-1.31	GHz $\geq$	50			dBc
Rejection	1.64-3	GHz $\geq$	50			dBc
Passband VSWR	/	/			1.50	

Other parameters

Connector	MMCX-K
Impedance	50 Ω
Surface	silver-plate
Power Capacity	20W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

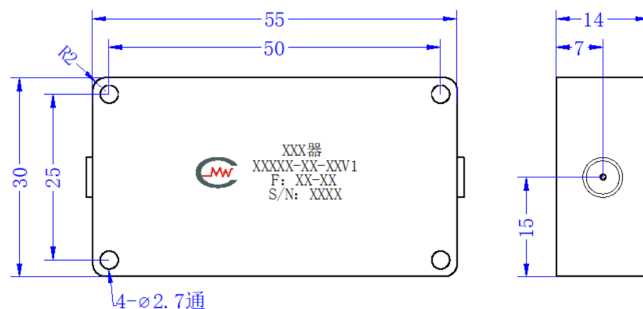

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.