


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	8457.5	~	8542.5	MHz
Passband IL	/	/			3.0	dB
Rejection	DC-8190	MHz $\geq$	50			dB
Rejection	8830-23627.5	MHz $\geq$	50			dB
Passband VSWR	/	/			1.5	

Configuration(mm)

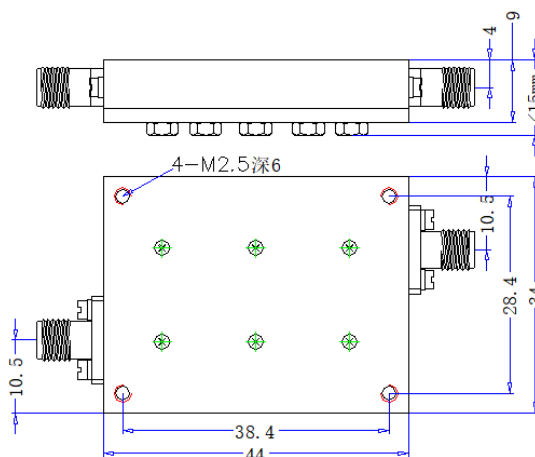

Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	Black
Power Capacity	10W Design assurance
Operation Temp.	-10~+65°C设计保证

Typical test curve

