


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	3470	~	3570	MHz
Passband IL	/	/			1.5	dB
Ripple	/	/			0.6	dB
Rejection	DC-3.2	GHz $\geq$	65			dBc
Rejection	3820-6000	MHz $\geq$	65			dBc
Passband VSWR	/	/			1.4	

Configuration(mm)

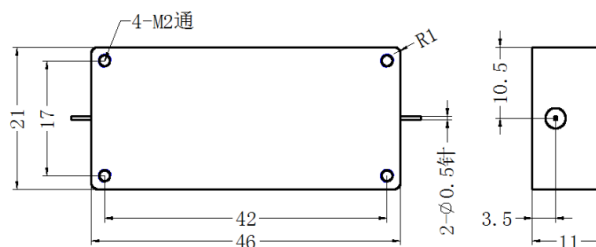

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	Pin 0.5mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	2W Design assurance
Product shell material	Aluminium
Phase balance	$\leq \pm 3^\circ$ (same batch)
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance