

Product features

It has the characteristics of wide bandwidth, low sidelobes, and high efficiency.


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	400	~	8000	MHz
Gain		10		dBi
VSWR		2.0		
3dB Beamwidth	25		110	°
power		250		W (Design assurance)

Other parameters

Polarization	Linear Pol.
Connector	N -K
Connector material	Housing 304 stainless steel
Outline size	437*293*359mm
Estimated weight	4Kg
Surface	Sandblasting Nature Color Conductive Oxidation
Operation Temp.	-25~+65°C Design assurance
Storage Temp.	-40~+75°C Design assurance


Configuration(mm)

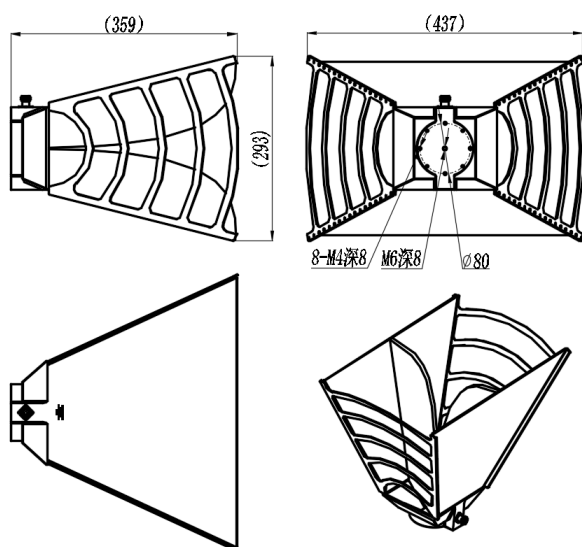

Reference picture



Typical test curve

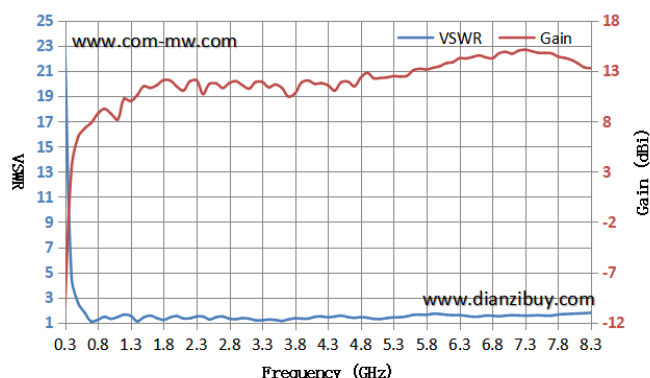

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Note

1. Non professionals are not allowed to disassemble.

/