

Product features

High cost performance semi flexible cable components.


Main specifications

Items	Frequency (G)	Min	Type	Max	Units
Frequency		DC	~	18	GHz
IL	DC-2		0.56	0.81	dB
IL	2-6		1.18	1.31	dB
IL	6-12		2.09	2.47	dB
IL	12-18		3.05	3.28	dB
VSWR	DC-2		1.03	1.15	dB
VSWR	2-6		1.06	1.15	dB
VSWR	6-12		1.08	1.33	dB
VSWR	12-18		1.20	1.33	dB

Other parameters

Cable category	Hand-Flex Cable
Length	1000mm
Connector 1	N-M Stainless steel
Connector 2	SMA-M Stainless steel
Impedance	50Ω
Operation Temp.	-40~+85°C Design assurance
Storage Temp.	-40~+85°C Design assurance

Configuration

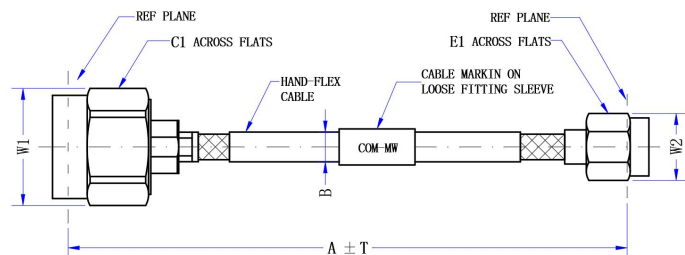


Reference picture



Typical test data

Frequency	IL	Input VSWR	Output VSWR
100	0.05	1.01	1.01
1000	0.41	1.04	1.02
1500	0.81	1.03	1.03
2500	0.97	1.05	1.02
4000	1.07	1.04	1.04
5000	1.18	1.07	1.05
6000	1.31	1.08	1.06
7000	1.47	1.07	1.08
8000	1.70	1.09	1.09
9000	1.87	1.10	1.11
10000	2.09	1.11	1.13
12000	2.47	1.12	1.14
14000	2.69	1.13	1.16
16000	3.18	1.19	1.19
18000	3.28	1.20	1.21

Typical test curve

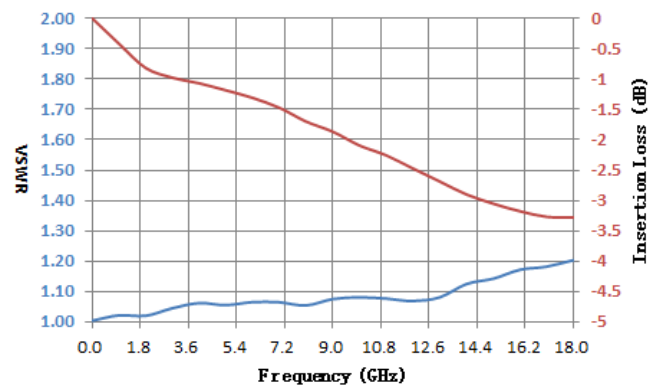


Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.


Overall dimensions (mm)

A	1000	mm	C1	20.0	mm
B	4.2	mm	E1	8.9	mm
T	7.6	mm	W1	21.4	mm
			W2	8.0	mm

Type power curve

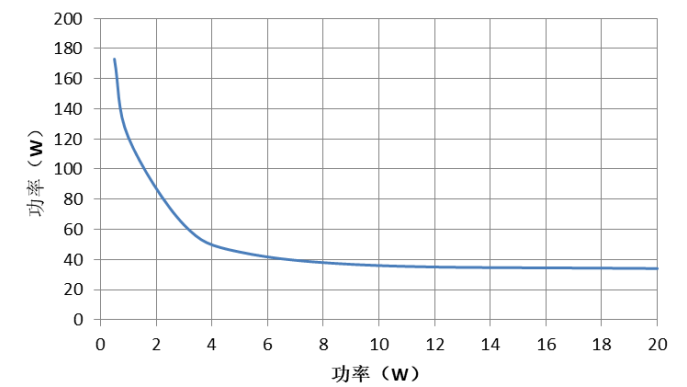

Cable structure diagram

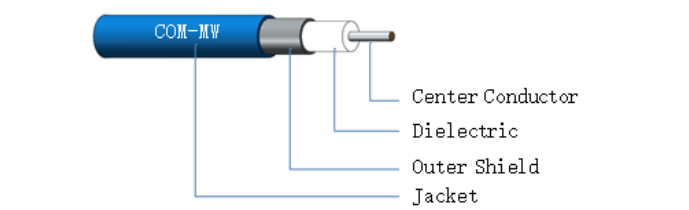

Note

- 1
- Suggested installation radius greater than 10mm

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.