

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	2300	~	2484	MHz
Passband F2	/	/	2525	~	2700	MHz
band 1 IL	/	/			0.5	dB
band 2 IL	/	/			0.5	dB
Passband VSWR	/	/			1.5	
Band 1 Rejection	2525-4000	MHz $\geq$	40			dB
band 2 Rejection	DC-2484	MHz $\geq$	40			dB


Other parameters

Connector	SMA-K
Connector material	Stainless steel
Impedance	50 Ω
Surface	Black baking paint
Power Capacity	110W Design assurance
Operation Temp.	-40~+70°C Design assurance

Port Definition

1	Common port	ANT
2	Passband 1	F1
3	Passband 2	F2
4	GND Port	---

Configuration(mm)

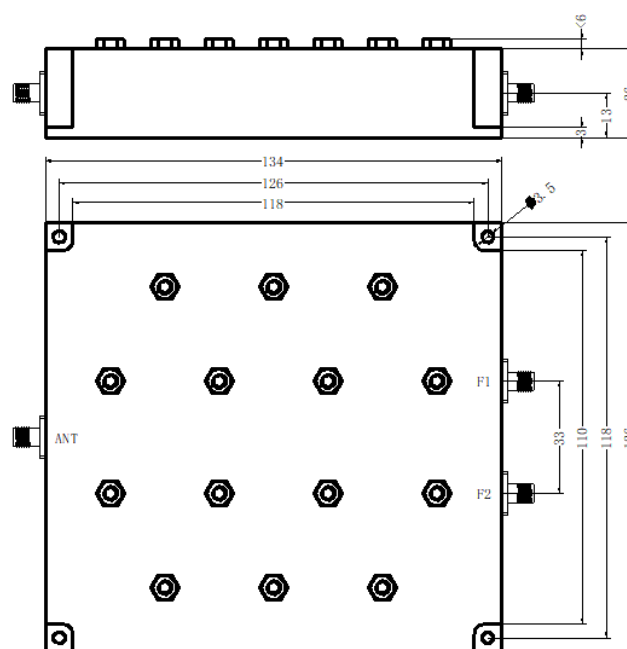

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 1 If the temperature is higher than 125°C, consult with us before ordering.