


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	2	~	18	GHz
IL			1.4	dB
Theoretical loss		3		dB
Isolation		18		dB
VSWR			1.5	
Amplitude balance			1	dB
Phase balance			±6	°

Other parameters

Power Capacity	30W Design assurance
Phase	90° Hybrid
Impedance	50Ω
Connector	SMA-F or K Detachable Pin 0.38mm
Surface	silver-plate
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance
Quality Grade	Industrial grade

Configuration(mm)

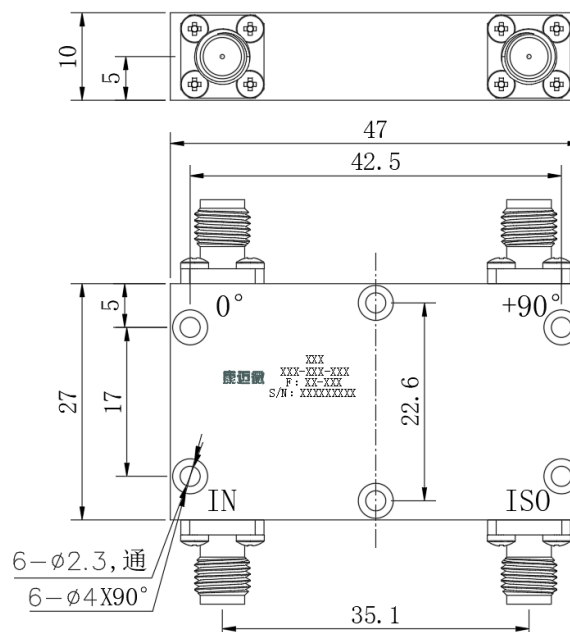

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.