

## Product features

Broadband, high-power.

## Main specifications

| Parameters | Min | Typical | Max  | Units |
|------------|-----|---------|------|-------|
| Frequency  | DC  | ~       | 18   | GHz   |
| VSWR       |     |         | 1.35 |       |

## Other parameters

|                        |                                 |
|------------------------|---------------------------------|
| Power                  | 100W Design assurance           |
| Impedance              | 50Ω                             |
| Connector              | N-J                             |
| Connector material     | Stainless steel                 |
| Surface                | Black                           |
| Product shell material | Aluminum                        |
| Work Temp.             | -40~+85°C Design assurance      |
| Other                  | 100W@25 °C ambient temperature. |


## Note

When installing the load, it is necessary to consider sufficient heat dissipation space and not install it next to equipment with high heat output.

## Reference picture



## Configuration(mm)

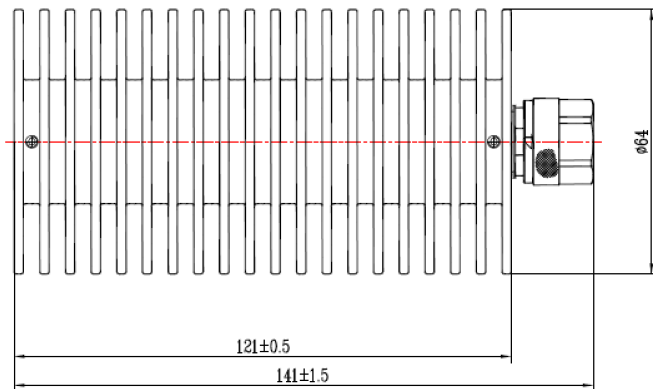

## Typical test curve

