

Product features

宽带测向天线。




Main specifications

Parameters	Min	Typical	Max	Units
	120	~	6000	MHz
测向1频率	120	~	1500	MHz
测向2频率	1000	~	6000	MHz
		-3		dBi
测向1增益		-9		dBi
测向2增益		-7		dBi
VSWR		3.0		

Other parameters


Polarization	Vertical polarization
Power Capacity	1W Design assurance
Connector	SMA-J*19个
Outline size	510*510*1200mm不含电缆
Estimated weight	5Kg
Surface	交通白RAL9016
Operation Temp.	-25~+55°C Design assurance
Storage Temp.	-30~+60°C Design assurance

Typical test curve

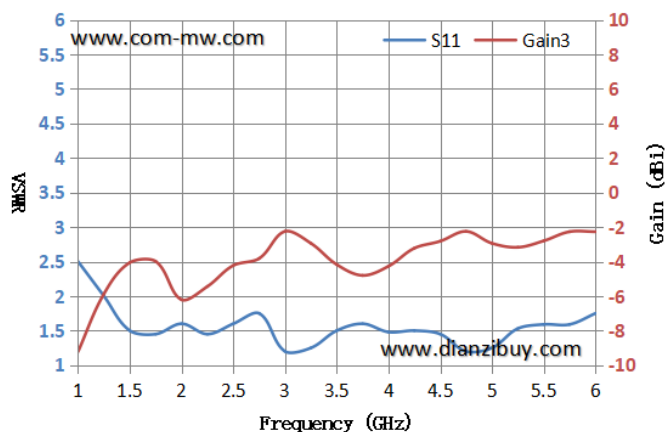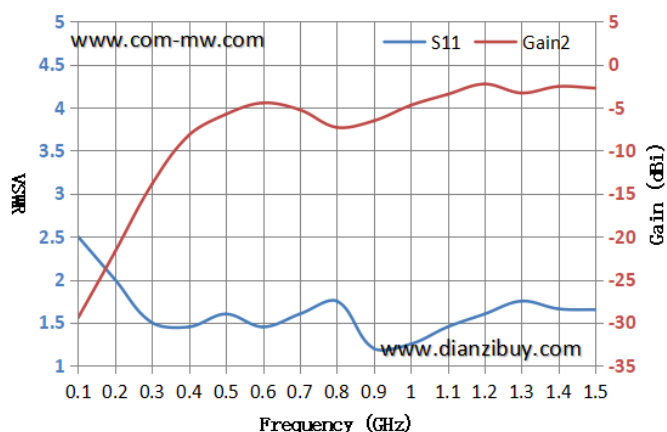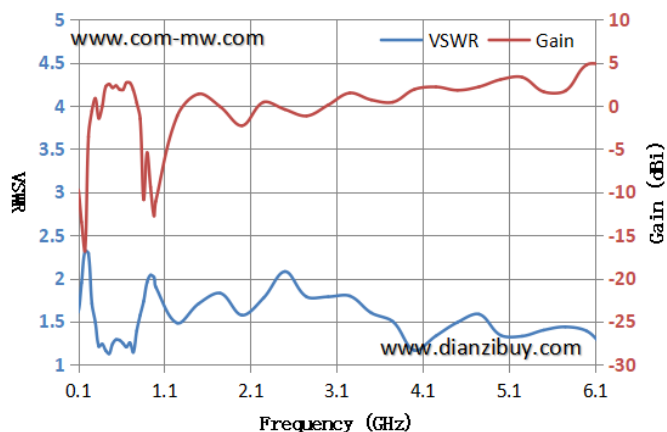

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Configuration(mm)

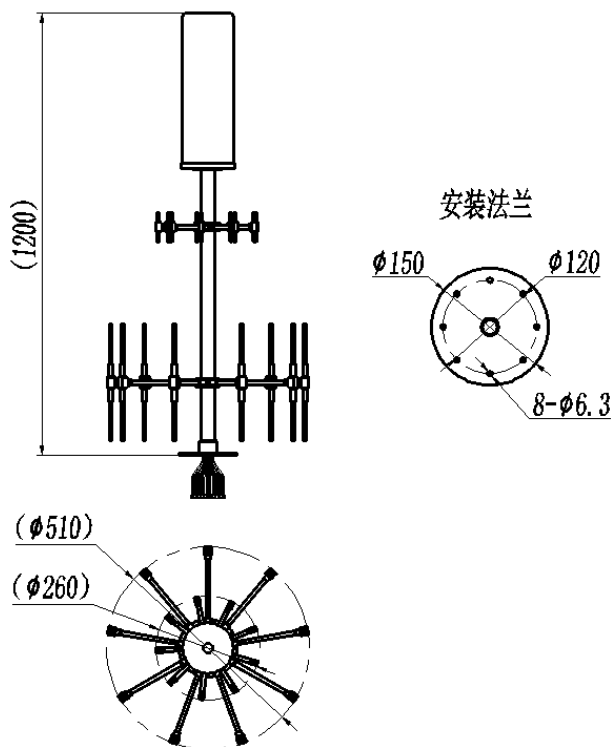

Note

Avoid collisions during installation.

It is strictly prohibited to disassemble antenna accessories, as it may cause poor antenna performance.

The installation position of the antenna should be free of any obstacles.

Outdoor use should be equipped with lightning protection facilities.

May contain electronic components, please do not dispose of them randomly.